


# CIRRUS® Square Lay-in medium texture



UP TO **86%** RECYCLED CONTENT


**LEED®**

Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

**EPD**  
AVAILABLE

acoustics energy daylight & views indoor air quality renewable materials recycled content waste mgmt local\* materials

\*LOCATION DEPENDENT

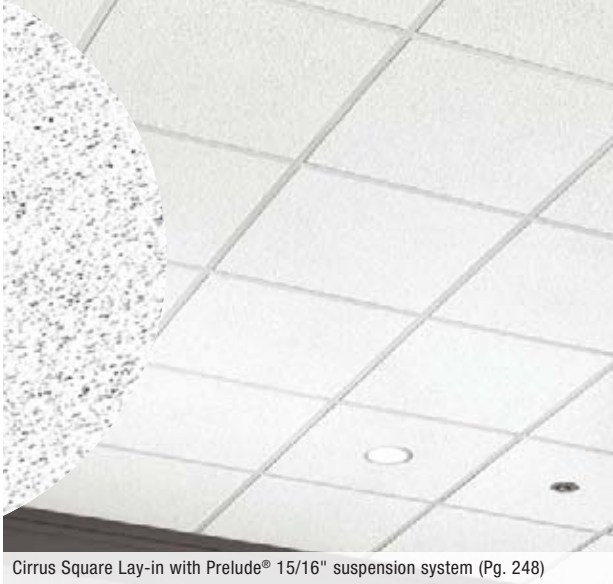

Cirrus Square Lay-in with Prelude® 15/16" suspension system (Pg. 248)

## KEY SELECTION ATTRIBUTES

- Refined visual
- Excellent sound absorption
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options:  
Items 574HRC and 533HRC.  
71% Pre-consumer;  
15% Post-consumer
- 94% Biobased content (see page 331)

## TYPICAL APPLICATIONS

- Offices
- Healthcare – Assists in addressing HIPAA and FGI acoustical requirements
- Conference rooms
- Lobbies
- Public spaces/areas
- Department stores/retail



Visit [Armstrong.com](http://Armstrong.com)  
Photo Gallery to view more  
installation photos

SEARCH: cirrus

## COLOR









White


## VISUAL SELECTION

## PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 armstrong.com/catdwgs	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Primary (Embodied) Energy	Recycled Content*	Recycle Program	Warranty†
				NRC	CAC										
CIRRUS Square Lay-in				UL Classified				BioBlock+	Humi-Guard+			Below 11MJ/SF		Yes	No. of Years
15/16" Square Lay-in	1	 <b>574</b> <b>574HRC</b>	24 x 24 x 3/4" 24 x 24 x 3/4"	 0.70 ●	35	Class A	0.86 ●	●	●	●	Std	●	High	●	30
	1	 <b>533</b> <b>533HRC</b>	24 x 48 x 3/4" 24 x 48 x 3/4"	0.70 ●	35	Class A	0.86 ●	●	Std	●	Std	●	High	●	10
1	  <b>FastSize™</b>	W: 4" - 24" / L: 4" - 60" 3/4" Thick	0.70 ●	35	Class A	0.86 ●	●	Std	●	Std	●	High	●	10	

## SUSPENSION SYSTEMS



## PHYSICAL DATA

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

### ASTM E1264 Classification

Type III, Form 1, Pattern E I  
Fire Class A

### Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications. Excludes items 533, 533HRC, and large sizes.

### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

### VOC Emissions

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

### Primary (Embodied) Energy

See all LCA information on our EPD's.

### High Recycled Content\*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

### Insulation Value

R Factor – 1.9 (BTU units)  
R Factor – 0.33 (Watts units)

### 30-Year Performance Guarantee & Warranty†

When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Weight; Square Feet/Carton

533 – 1.21 lbs/SF; 48 SF/ctn  
574 – 1.10 lbs/SF; 48 SF/ctn

### Minimum Order Quantity

1 carton

### Metric Items Available

574M, 533M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

